



Tire Repair Materials
Reifen-Reparatur-Material
Tire Shop and Garage Consumables

Qingdao Hwi Li Hwa Auto Parts Co., Ltd
Hwi Li Hwa Auto Parts Co., Ltd

Add: 69 Laoshan Road, Qingdao 266100, CHINA
Web: www.hwilihwa.com www.hwilihwa.cn
Email: info@hwilihwa.com
rockiemeng@hotmail.com (Messenger)
Skype: rockie737
Tel: 0086 138 648 73995
Fax: 0086 532 555 76937




Catalogue

Tire Workshop Supplies



Contents




About us 2



Non-lead Steel Wheel Weights 5



Die Casting Zinc Wheel Weights 12



Tubeless Tire Valves 17



Tire Pressure Monitoring Valves 19



Tubeless Truck Tire Valves 24



Tire Shop Tools and Parts 30



Tire Repair Patch and Seal String 33

Wheel Accessory 37

Garage Equipment 41

Labor Saving Nut Wrench 42

Company Profile

Hwi Li Hwa Company was founded in Qingdao in September of 2004. Since the founding, we have been dedicated to manufacturing various tire maintenance and repair materials.

Now we have gradually completed a wide range of tire workshop and garage consumables, here are they:

- Wheel balancing weights made from Steel, Zinc and Lead. Non-lead Steel is the future alternative;
- Tubeless tire valves made from EPDM rubber, brass valve stem. Each and every single valve has to pass air leaking test to warehouse keeper;
- Multi-purpose repair patches and combi;
- Self-vulcanized tire puncture seal strings, and its plug tools.
- Labor saving nut wrench with a wide range of specification. It makes your nut loosen work ever easier.

Besides the above main product, we are also able to organize all tire work related tools and accessories. We are aiming to be one stop source for a tire workshop consumable buyer like you. You need not have to run at different doors to ask a full supply.

Both our management and products are in a strict conformity to ISO/TS16949. Our export volume comes mainly from European countries, therefore, all the raw materials and products conform to European regulations and RoHS directive.

We have built the global brand **RocRox** for international markets, which stands for a consistent quality standard and a uniform package identification. We are looking for the global partner in each different country and region to build this brand name together to a great one.

You are always cordially invited to our company in Qingdao City of Shandong Province, China. Our city is well known for her coastal summer resorts with the European style buildings and her ranking top 10 ocean ports of the world.



All About Tire Rim & More
www.hwilihwa.cn www.hwilihwa.com

The Words We Believe and Behave

--Quality Consistency Outstands Anything Else

--Our Partners Long term Interests Are Respected
and Pursued All the Time



We care not only for legislatives but also for our planet

Lead as a material is toxic and harmful

From the new millennium European council and most states in America have banned by legislation the use of Pb/Lead as the material for wheel balance weights

We care not only for legislatives but also for our planet as well

Since the year of 2006 we have developed the wheel balance weights made from Steel and Zinc as alternatives

We are doing all for a better world and a better green drive
With us, you wheel are rolling green ever.

In next pages


you are coming with the best alternative to Lead wheel weights.....





Steel Adhesive Wheel Balance Weights
FEAD60

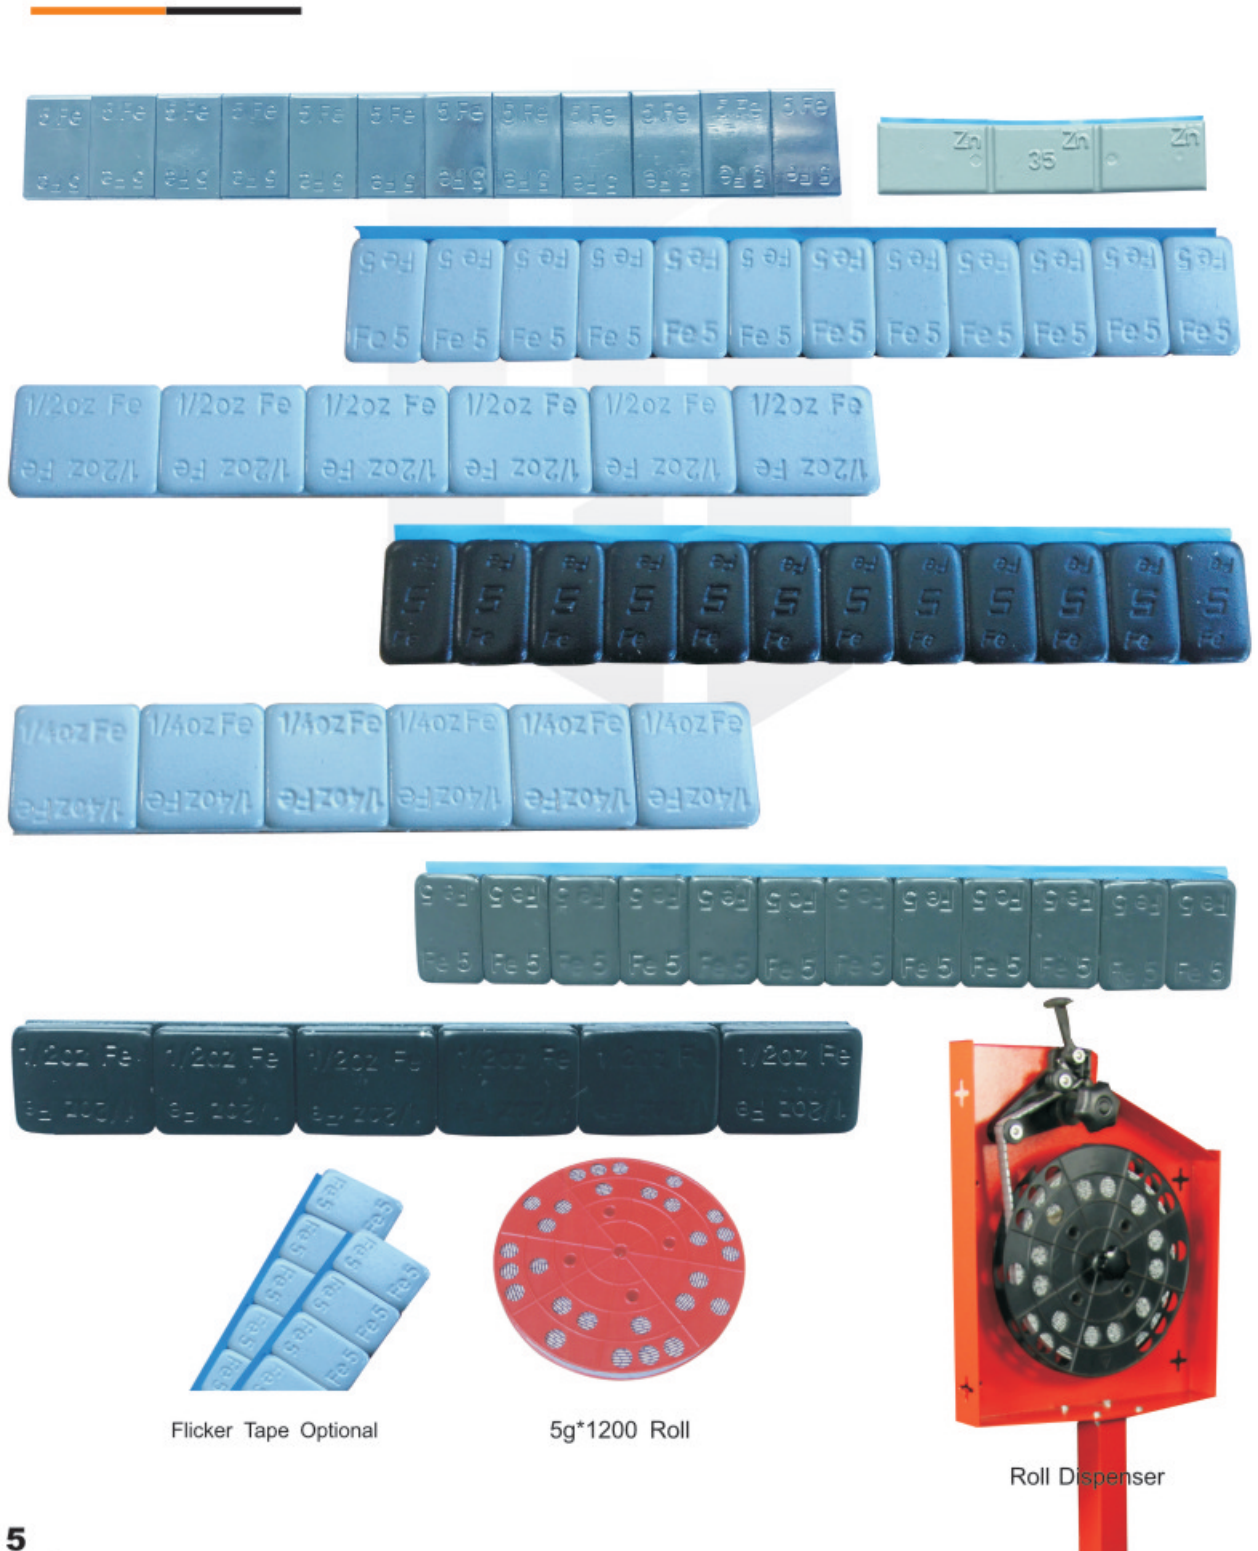

Steel Adhesive Wheel Balance Weights
FEAD60



Flicker Tape Optional

5g*1200 Roll

Roll Dispenser

Size (Gr)	Description	Package/box
5g*12	Raw Material: Fe, Lead free up to RoHS directive 	100
5g*4+10g*4		100
5g*10	Finish: Zinc Plated or Epoxy polyester coated Optional Finish Color: Silver, Black, Yellow and more 	100
5g*6	Anti-rust: 72 hours approved in salt spray test	100
2.5g*12	Adhesive Tape: Standard, DURACO, 3M, Saint-gobain Norton 	200
10g*6		100
5g*1200 roll		1
0.25oz*12	Applicable to: Universal for passenger car 	48
0.50oz*12		24
0.50oz*6		48
0.25oz*1200 roll	A variety of segment combination and dimension is available	1



Steel Premium Clip-on Wheel Balance Weights

FE60A-AW Plastic coated wheel weights



Fits alloy wheel of Buick, Cadillac, Chevrolet, Chrysler, Dodge, Eagle, Geo, Isuzu, Oldsmobile, Plymouth, Pontiac

Increment in ounce: 0.25, 0.50, 0.75, 1.00, 1.25, 1.50, 1.75, 2.00, 2.25, 2.50, 2.75, 3.00
Increment in gram: 5, 10, 15, 20, 25, 30, 35, 40, 45, 50, 55, 60

FE60A-MC Plastic coated wheel weights



Fits alloy wheel of Buick, Cadillac, Chevrolet, Chrysler, Dodge, Eagle, Ford, Lincoln, Mazda, Mercury, Mitsubishi, Geo, Isuzu, Oldsmobile, Plymouth, Pontiac, Saturn

Increment in ounce: 0.25, 0.50, 0.75, 1.00, 1.25, 1.50, 1.75, 2.00, 2.25, 2.50, 2.75, 3.00
Increment in gram: 5, 10, 15, 20, 25, 30, 35, 40, 45, 50, 55, 60

FE60A-IAW Plastic coated wheel weights



Fits alloy wheel of AMC, Audi, BMW, Chrysler, Dodge, Eagle, Geo, Hyundai, Merkur, Mitsubishi, Nissan/Datsun, Plymouth, Pontiac, Saab, Sterling, Subaru, Suzuki, Toyota, Volkswagen, Volvo

Increment in ounce: 0.25, 0.50, 0.75, 1.00, 1.25, 1.50, 1.75, 2.00, 2.25, 2.50, 2.75, 3.00
Increment in gram: 5, 10, 15, 20, 25, 30, 35, 40, 45, 50, 55, 60

Steel Premium Clip-on Wheel Balance Weights

FE60A-EN Plastic coated wheel weights



Fits alloy wheel of Acura, Audi, Ford, Honda, Mercedes, Volkswagen

Increment in ounce: 0.25, 0.50, 0.75, 1.00, 1.25, 1.50, 1.75, 2.00, 2.25, 2.50, 2.75, 3.00
Increment in gram: 5, 10, 15, 20, 25, 30, 35, 40, 45, 50, 55, 60

FE60A-FN Plastic coated wheel weights



Fits alloy wheel of Acura, Geo, Honda, Infiniti, Lexus, Nissan, Toyota

Increment in ounce: 0.25, 0.50, 0.75, 1.00, 1.25, 1.50, 1.75, 2.00, 2.25, 2.50, 2.75, 3.00
Increment in gram: 5, 10, 15, 20, 25, 30, 35, 40, 45, 50, 55, 60

FE60A-ST Plastic coated wheel weights



Fits Universal steel wheel

Increment in ounce: 0.25, 0.50, 0.75, 1.00, 1.25, 1.50, 1.75, 2.00, 2.25, 2.50, 2.75, 3.00
Increment in gram: 5, 10, 15, 20, 25, 30, 35, 40, 45, 50, 55, 60








Steel OEM Clip-on Wheel Balance Weights FE60EM-ST/AL



FE60EM-ST45



FE60EM-AL40

Part No.	Size (Gr)	Description	Package/box
H101805	5g	Raw Material: Fe, Lead free up to RoHS directive  Finish: Geomet or Epoxy polyester coated Optional Finish Color: Silver, Black, Yellow and more  Anti-rust: 72 hours approved in salt spray test Applicable to: Steel rim of passenger car 	100
H101810	10g		100
H101815	15g		100
H101820	20g		100
H101825	25g		100
H101830	30g		100
H101835	35g		50
H101840	40g		50
H101845	45g		50
H101850	50g		50
H101855	55g	50	
H101860	60g	50	
H101905	5g	Raw Material: Fe, Lead free up to RoHS directive  Finish: Geomet or Epoxy polyester coated Optional Finish Color: Silver, Black, Yellow and more  Anti-rust: 72 hours approved in salt spray test Applicable to: Alloy rim of passenger car 	100
H101910	10g		100
H101915	15g		100
H101920	20g		100
H101925	25g		100
H101930	30g		100
H101935	35g		50
H101940	40g		50
H101945	45g		50
H101950	50g		50
H101955	55g	50	
H101960	60g	50	







Steel Standard Clip-on Wheel Balance Weights FE60SN-ST/AL



FE60SN-ST45



FE60SN-AL35

Part No.	Size (Gr)	Description	Package/box
H101405	5g	Raw Material: Fe, Lead free up to RoHS directive  Finish: Epoxy polyester coated Optional Finish Color: Silver, Black, Yellow and more  Anti-rust: 72 hours approved in salt spray test Applicable to: Steel rim of passenger car 	100
H101410	10g		100
H101415	15g		100
H101420	20g		100
H101425	25g		100
H101430	30g		100
H101435	35g		50
H101440	40g		50
H101445	45g		50
H101450	50g		50
H101455	55g	50	
H101460	60g	50	
H101505	5g	Raw Material: Fe, Lead free up to RoHS directive  Finish: Epoxy polyester coated Optional Finish Color: Silver, Black, Yellow and more  Anti-rust: 72 hours approved in salt spray test Applicable to: Alloy rim of passenger car 	100
H101510	10g		100
H101515	15g		100
H101520	20g		100
H101525	25g		100
H101530	30g		100
H101535	35g		50
H101540	40g		50
H101545	45g		50
H101550	50g		50
H101555	55g	50	
H101560	60g	50	



Steel Universal Clip-on Wheel Balance Weights
FE60AX-ST/AL

Die Casting Zinc Premium Clip-on Wheel Balance Weights
ZN60EU-ST/AL



FE60AX-ST30



FE60AX-AL40





ZN60EU-ST35



ZN60EU-AL25

Part No.	Size (Gr)	Description	Package/box
H101605	5g	Raw Material: Fe, Lead free up to RoHS directive  Finish: Epoxy polyester coated Optional Finish Color: Silver, Black, Yellow and more  Anti-rust: 72 hours approved in salt spray test Applicable to: Steel rim of passenger car 	100
H101610	10g		100
H101615	15g		100
H101620	20g		100
H101625	25g		100
H101630	30g		100
H101635	35g		50
H101640	40g		50
H101645	45g		50
H101650	50g		50
H101655	55g	50	
H101660	60g	50	
H101705	5g	Raw Material: Fe, Lead free up to RoHS directive  Finish: Epoxy polyester coated Optional Finish Color: Silver, Black, Yellow and more  Anti-rust: 72 hours approved in salt spray test Applicable to: Alloy rim of passenger car 	100
H101710	10g		100
H101715	15g		100
H101720	20g		100
H101725	25g		100
H101730	30g		100
H101735	35g		50
H101740	40g		50
H101745	45g		50
H101750	50g		50
H101755	55g	50	
H101760	60g	50	

Part No.	Size (Gr)	Description	Package/box
H102105	5g	Raw Material: Zinc, Lead Free up to RoHS Directive  Manufacture method: Die casting by machine Finish: Epoxy polyester coated  Optional Finish Color: Silver, Black, Yellow and more Anti-corrosion: 72 hours approved in salt spray test 	100
H102110	10g		100
H102115	15g		100
H102120	20g		100
H102125	25g		100
H102130	30g		100
H102135	35g		50
H102140	40g		50
H102145	45g		50
H102150	50g		50
H102155	55g	50	
H102160	60g	50	
H102205	5g	Raw Material: Zinc, Lead Free up to RoHS Directive  Manufacture method: Die casting by machine Finish: Epoxy polyester coated  Optional Finish Color: Silver, Black, Yellow and more Anti-corrosion: 72 hours approved in salt spray test 	100
H102210	10g		100
H102215	15g		100
H102220	20g		100
H102225	25g		100
H102230	30g		100
H102235	35g		50
H102240	40g		50
H102245	45g		50
H102250	50g		50
H102255	55g	50	
H102260	60g	50	



Zinc Standard Clip-on Wheel Balance Weights
ZN60SN-ST/AL



ZN60SN-ST40



ZN60SN-AL35

Part No.	Size (Gr)	Description	Package/box
H102305	5g	<p>Raw Material: Zinc, Lead free up to RoHS directive</p> <p>Finish: Epoxy polyester coated</p> <p>Optional Finish Color: Silver, Black, Yellow and more</p> <p>Anti-corrosion: 72 hours approved in salt spray test</p> <p>Applicable to: Steel rim of passenger car</p>	100
H102310	10g		100
H102315	15g		100
H102320	20g		100
H102325	25g		100
H102330	30g		100
H102335	35g		50
H102340	40g		50
H102345	45g		50
H102350	50g		50
H102355	55g	50	
H102360	60g	50	
H102405	5g	<p>Raw Material: Zinc, Lead free up to RoHS directive</p> <p>Finish: Epoxy polyester coated</p> <p>Optional Finish Color: Silver, Black, Yellow and more</p> <p>Anti-corrosion: 72 hours approved in salt spray test</p> <p>Applicable to: Alloy rim of passenger car</p>	100
H102410	10g		100
H102415	15g		100
H102420	20g		100
H102425	25g		100
H102430	30g		100
H102435	35g		50
H102440	40g		50
H102445	45g		50
H102450	50g		50
H102455	55g	50	
H102460	60g	50	

Zinc Universal Clip-on Wheel Balance Weights
ZN60UN-ST/AL



ZN60UN-ST35




ZN60UN-AL35

Part No.	Size (Gr)	Description	Package/box
H102505	5g	<p>Raw Material: Zinc, Lead free up to RoHS directive</p> <p>Finish: Epoxy polyester coated</p> <p>Optional Finish Color: Silver, Black, Yellow and more</p> <p>Anti-corrosion: 72 hours approved in salt spray test</p> <p>Applicable to: Steel rim of passenger car</p>	100
H102510	10g		100
H102515	15g		100
H102520	20g		100
H102525	25g		100
H102530	30g		100
H102535	35g		50
H102540	40g		50
H102545	45g		50
H102550	50g		50
H102555	55g	50	
H102560	60g	50	
H102605	5g	<p>Raw Material: Zinc, Lead free up to RoHS directive</p> <p>Finish: Epoxy polyester coated</p> <p>Optional Finish Color: Silver, Black, Yellow and more</p> <p>Anti-corrosion: 72 hours approved in salt spray test</p> <p>Applicable to: Alloy rim of passenger car</p>	100
H102610	10g		100
H102615	15g		100
H102620	20g		100
H102625	25g		100
H102630	30g		100
H102635	35g		50
H102640	40g		50
H102645	45g		50
H102650	50g		50
H102655	55g	50	
H102660	60g	50	



**Lead Standard Clip-on Wheel Balance Weights
PB60SN-ST/AL**

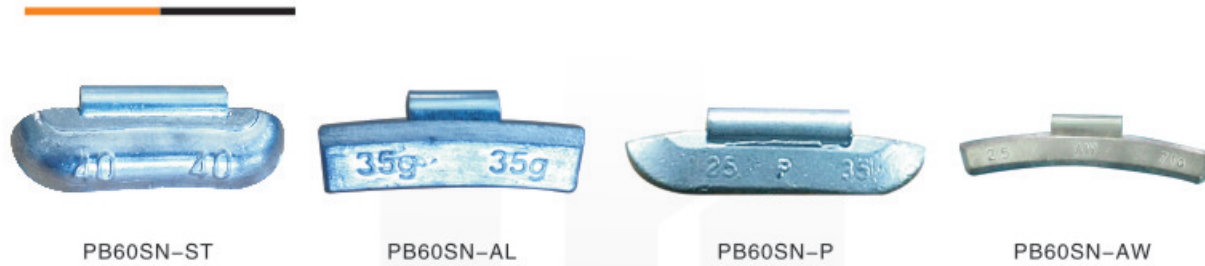

Part No.	Size (Gr)	Description	Package/box
H103105	5g	<p>Raw Material: Lead/Pb</p> <p>Finish: Epoxy polyester coated</p> <p>Optional Finish Color: Silver, Black, Yellow and more</p> <p>Anti-rust: 72 hours approved in salt spray test</p> <p>Applicable to: Steel rim of passenger car</p>	100
H103110	10g		100
H103115	15g		100
H103120	20g		100
H103125	25g		100
H103130	30g		100
H103135	35g		50
H103140	40g		50
H103145	45g		50
H103150	50g		50
H103155	55g	50	
H103160	60g	50	
H103205	5g	<p>Raw Material: Lead/Pb</p> <p>Finish: Epoxy polyester coated</p> <p>Optional Finish Color: Silver, Black, Yellow and more</p> <p>Anti-rust: 72 hours approved in salt spray test</p> <p>Applicable to: Alloy rim of passenger car</p>	100
H103210	10g		100
H103215	15g		100
H103220	20g		100
H103225	25g		100
H103230	30g		100
H103235	35g		50
H103240	40g		50
H103245	45g		50
H103250	50g		50
H103255	55g	50	
H103260	60g	50	


**Lead Adhesive Wheel Balance Weights
PBAD60**



Size (Gr)	Description	Package/box	
5g*12	<p>Raw Material: Pb/Lead</p> <p>Finish: Epoxy polyester coated</p> <p>Adhesive Tape: Standard, DURACO, 3M, Saint-gobain Norton</p> <p>A variety of segment combination and dimension is available</p>	100	
5g*4+10g*4		100	
5g*10		100	
5g*6		100	
2.5g*12		200	
10g*6		100	
5g*1200 roll		1	
50g		<p>Applicable to: Universal for Truck and Bus</p>	50
75g			50
100g			25
150g	25		
200g	25		
250g	15		
300g	15		




EPDM rubber valves have the best Ozone resistance.
Each valve is tested under standard of E.T.R.T.O. and DIN 78030




Test Rig Installation



Ozone Resistance Test



Rubber – Metal Adhesion Test



Burst & Leaking Tightness Test



Snap-in Tubeless Tire Valves for Passenger Car



Part No.	ETRTO No. (Ref No.)	Rim Hole Dia. (mm/in.)	Eff. Length (mm)	A	B	C	Parts	
							Core	Cap
TR412	V2.03.6	11.5/.453"	22	33	22	15	9002#	VC8-BLACK
TR413	V2.03.1	11.5/.453"	30	42.5	32	15	9002#	VC8-BLACK
TR414	V2.03.2	11.5/.453"	38	48.5	38	15	9002#	VC8-BLACK
TR414L	V2.03.8	11.5/.453"	45	56.5	46	15	9002#	VC8-BLACK
TR418	V2.03.4	11.5/.453"	49	61.5	51	15	9002#	VC8-BLACK
TR423		11.5/.453"	62	74	63.5	15	9002#	VC8-BLACK
TR415	V2.03.3	16/.625"	30	42.5	32	19.2	9002#	VC8-BLACK
TR425		16/.625"	49	61.5	51	19.2	9002#	VC8-BLACK
TR438	V2.03.5	8.8/.346"	32	40.5	31	11	9002#	VC8-BLACK
TR429	V2.03.9	8.8/.346"	51	61.5	51	11	9002#	VC8-BLACK





Snap-in High Pressure Tubeless Tire Valves for Passenger Car



TR802HP TR801HP TR602HP TR600HP TR602HP-C TR602HP-G TR602HP-R TR602HP-P

Part No.	ETRTO No. (Ref No.)	Rim Hole Dia. (mm/in.)	Eff. Length (mm)	A	B	C	Parts	
							Core	Cap
TR600HP		11.5/.453"	31				9002#	VC8-BLACK
TR602HP		11.5/.453"	50				9002#	VC8-BLACK
TR801HP		16/.625"	33				9002#	VC8-BLACK
TR802HP		16/.625"	50				9002#	VC8-BLACK



TPMS414 TPMS23-B TPMS23-Y TPMS21 TPMS22 TPMS25 TPMS26 TPMS27 TPMS28



Metal Clamp-in Tubeless Tire Valves for Passenger Car



V2.04.1 TR416 TR416S MS525S MS525L MS525AL MS525AL-B

Part No.	Ref. Length (mm)	Rim Hole Dia. (mm/in.)	Parts			
			Rubber Grommet	Washer	Nut	Cap
V2.04.1	17.5X35	11.5/.453"	V9.11.7		V9.7.1	CAP25
TR416	17X40	16/.625"	RG39	RW13	HN4	CAP25
TR416B	17X38/34	11.5/.453" 16/.625"	RG39 RG54	RW8	HN4	CAP24
TR416L	16.7X59	11.5/.453"	RG59	RW1	HN4	CAP25
TR416S	17X40	11.5/.453"	RG54	RW1	HN4	CAP25
TR416SS	14X38	11.5/.453"	V801	RW1	HN8	CAP25
TR416SSS	14X39	8.3/.327"	RG11	RW7	HN8	CAP25
MS525S	17.5X41.5	11.5/.453"	RG9 RG54	RW15	HN6	CAP25
MS525L	17.5X41.5	11.5/.453"	RG9 RG54	RW15	HN7	CAP25
MS525AL	17X42	11.5/.453"	RG9 RG54	RW15	HN9	CAP25





Metal Clamp-in Tubeless Tire Valves for Passenger Car



Part No.	ETRTO No. (Ref. No.)	Ref. Length (mm)	Rim Hole Dia. (mm/in.)	Parts			
				Rubber Grommet	Washer	Nut	Cap
V-3	TR33E WH23A	14X33	11.5/.453"	HRG2X2	RW5	HN2X2	CAP21
V-4	TR43E WH206	14X43	11.5/.453"	HRG2X2	RW5	HN2X2	CAP21
V-5	TR48E	14X48	11.5/.453"	HRG2X2	RW5	HN2X2	CAP21
V-6	TR53E WH204	14X53	11.5/.453"	HRG2X2	RW5	HN2X2	CAP21
V-7	TR63E	14X63	11.5/.453"	HRG2X2	RW5	HN2X2	CAP21
V-8	TR34A	16X34	11.5/.453"	HRG1 HG2	RW12	HN2X2	CAP21
VS-8	TR34A	16X38	11.5/.453"	HRG1 HG2	RW12	HN2X2	CAP21
VS-8-45°	Wh303 PVR75A	16X53-45°	11.5/.453"	HRG1 HG2	RW12	HN2X2	CAP21
VS-8-90°	Wh303 PVR75A	16X53-90°	11.5/.453"	HRG1 HG2	RW12	HN2X2	CAP21
V-9	JS43E	16X43	11.5/.453"	HRG1 HG2	RW12	HN2X2	CAP21
TR435		19X34	11.5/.453"	RW8	RW8	HN4	CAP21
VS-6		11X40	6/.236"		RW3	BN1	CAP21
TR6008C	TRJF944	17.5X34	16/.625"	RG39	RW13	BN1	CAP21
TR5991B	WH402	19X34	16/.625" 11.5/.453"	RG39 RG54	RW8	HN4	CAP21
TRVA200		17.5X38	11.5/.453"	RW54	RW15	HN9	CAP25

Metal Clamp-in Tire Valves for Motorcycle and Scooter



Part No.	Ref. Length (mm)	Rim Hole Dia. (mm/in.)	Parts			
			Rubber Grommet	Washer	Nut	Cap
TR416A	16X34.5	11.5/.453"	HG2	RW12	HN2	CAP22
TR430A	14X33	11.5/.453"	RG59	RW12	HN2	CAP22
JS430	14X37	11.5/.453"	RG59	RW12	HN2	CAP22
PVR70	20X30X90°	11.5/.453"			HN2	VC8-BLACK
PVR71L	20X45X90°	11.5/.453"			HN2	VC8-BLACK
PVR32	15X54X90°	11.5/.453"			SNM5	VC8-BLACK
PVR79L	15X72X90°	11.5/.453"	HG2		SNM5	VC8-BLACK
PVR30	15X63X90°	11.5/.453"	HG2		HN2	VC8-BLACK






Metal Clamp-in Tubeless Tire Valves for Truck and Bus



Part No.	ETRTO No. (Ref No.)	Ref. Length (mm)	Parts				
			Rubber Grommet	Washer	Nut	Core	Cap
TR500	V3.21.3	19X55	RG15	RW8	HN13	9002#	CAP27
TR501	V3.21.2	19X42	RG15	RW8	HN13	9002#	CAP27
TR502	64MS15.7	19X64	RG15	RW8	HN13	9002#	CAP27
TR570	V3.21.4	19X84	RG15	RW8	HN13	9002#	CAP27
TR571	V3.21.5	19X90	RG15	RW8	HN13	9002#	CAP27
TR572	V3.21.6	19X100	RG15	RW8	HN13	9002#	CAP27
TR573	V3.21.7	19X115	RG15	RW8	HN13	9002#	CAP27
TR574	V3.21.8	19X131	RG15	RW8	HN13	9002#	CAP27
TR575	V3.21.1	19X33	RG15	RW8	HN13	9002#	CAP27
TR570C	V3.21.9	19X84-90° 27°	RG15	RW8	HN13	9002#	CAP27
TR571C	V3.21.10	19X90-90° 27°	RG15	RW8	HN13	9002#	CAP27
TR572C	V2.21.11	19X100-90° 27°	RG15	RW8	HN13	9002#	CAP27
TR573C	V3.21.12	19X115-90° 27°	RG15	RW8	HN13	9002#	CAP27
TR574C		19X131-90° 27°	RG15	RW8	HN13	9002#	CAP27
TR500-23	VS-1223R	19X55-23°	RG15	RW8	HN13	9002#	CAP27
TR501-OVH		19X42	RG15-OV	RW8-OV	HN13	9002#	CAP27

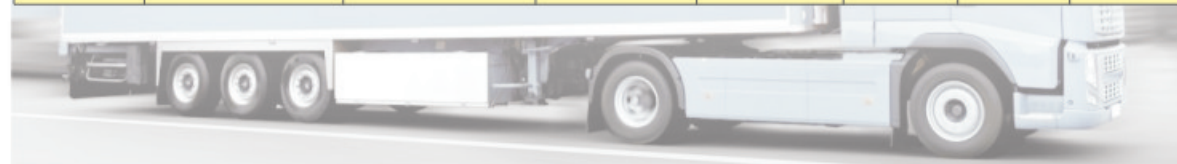

European Style Clamp-in Tubeless Tire Valves for Truck and Bus



Part No.	Ref. Length (mm)	Parts			
		Rubber Grommet	Nut	Core	Cap
V3.20.1	16X41	V9.11.5(RG60)	V9.07.2	9002#	CAP27
V3.20.2	16X95-17.5°	V9.11.5(RG60)	V9.07.2	9002#	CAP27
V3.20.3	16X82	V9.11.5(RG60)	V9.07.2	9002#	CAP27
V3.20.4	16X90-27°	V9.11.5(RG60)	V9.07.2	9002#	CAP27
V3.20.5	16X70-27°	V9.11.5(RG60)	V9.07.2	9002#	CAP27
V3.20.6	16X115-27°	V9.11.5(RG60)	V9.07.2	9002#	CAP27
V3.20.7	16X80-27°	V9.11.5(RG60)	V9.07.2	9002#	CAP27
V3.20.8	16X119-12°	V9.11.5(RG60)	V9.07.2	9002#	CAP27
V3.20.9	16X102-12°	V9.11.5(RG60)	V9.07.2	9002#	CAP27
V3.20.10	16X80-28°	V9.11.5(RG60)	V9.07.2	9002#	CAP27
V3.20.11	16X75-27°	V9.11.5(RG60)	V9.07.2	9002#	CAP27
V3.20.12	16X100-27°	V9.11.5(RG60)	V9.07.2	9002#	CAP27
150MS-27	16X150-27°	V9.11.5(RG60)	V9.07.2	9002#	CAP27
133MS-27	16X133-27°	V9.11.5(RG60)	V9.07.2	9002#	CAP27
97MS-30	16X97-30°	V9.11.5(RG60)	V9.07.2	9002#	CAP27
58MS(V3.22.1)	16X58-45°	V9.11.5(RG60)	V9.07.2	9002#	CAP27





European Style Clamp-in Tubeless Tire Valves for Truck and Bus




Part No.	Ref. Length (mm)	Rim Hole Dia. (mm/in.)	Parts			
			Rubber Grommet	Nut	Core	Cap
V3.12.1	26X21.5X40	16/.625"	V9.11.4	V9.13.1	9002#	CAP25
V3.12.2	26X21.5X95	16/.625"	V9.11.4	V9.13.1	9002#	CAP25

Part No.	Ref. Length(mm)			Rim Hole Dia. (mm/in.)	Parts			
	D	A	W		Rubber Grommet	Nut	Core	Cap
V3.13.1	46.5	42.5	153°	16/.625"	V9.11.4	V9.13.1	9002#	CAP25
V3.13.2	30	29	126°	16/.625"	V9.11.4	V9.13.1	9002#	CAP25

Part No.	Ref. Length(mm)			Rim Hole Dia. (mm/in.)	Parts			
	B	A	C		Rubber Grommet	Nut	Core	Cap
V3.14.1	26	21.5	24.5	16/.625"	V9.11.4	V9.13.1	9002#	CAP25
V3.14.2	45	21.5	24.5	16/.625"	V9.11.4	V9.13.1	9002#	CAP25
V3.14.3	37	21.5	24.5	16/.625"	V9.11.4	V9.13.1	9002#	CAP25

Part No.	Ref. Length(mm)			Rim Hole Dia. (mm/in.)	Parts			
	B	A	W		Rubber Grommet	Nut	Core	Cap
V3.15.1	14	22.5	110°	20.5/.812"	V9.11.2	V9.13.1	9002#	CAP25
V3.15.2	11	15.5	95°	20.5/.812"	V9.11.2	V9.13.1	9002#	CAP25

European Style Clamp-in Tubeless Tire Valves for Truck and Bus

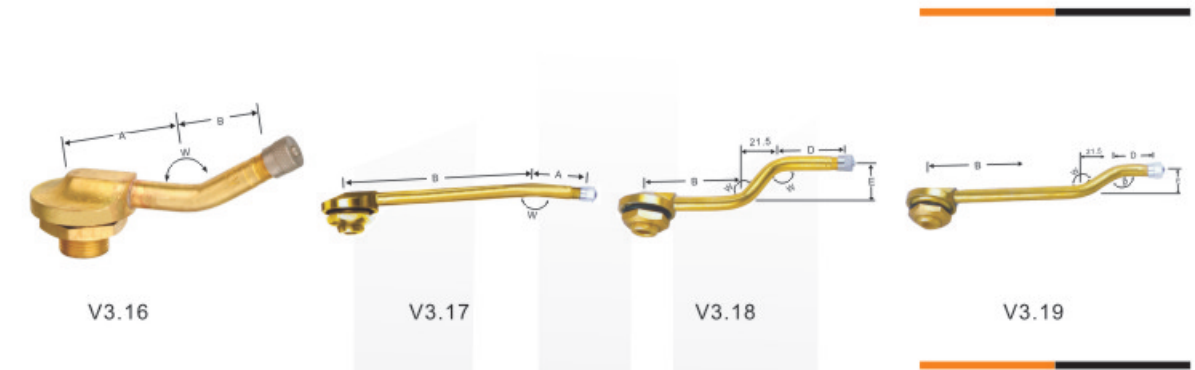

Part No.	Ref. Length(mm)			Rim Hole Dia. (mm/in.)	Parts			
	A	B	W		Rubber Grommet	Nut	Core	Cap
V3.16.1	36	29	150°	20.5/.812"	V9.11.4	V9.13.1	9002#	CAP25

Part No.	Ref. Length(mm)			Rim Hole Dia. (mm/in.)	Parts			
	A	B	W		Rubber Grommet	Nut	Core	Cap
V3.17.1	31.5	99	172°	20.5/.812"	V9.11.2	V9.13.1	9002#	CAP25
V3.17.2	31.5	116	172°	20.5/.812"	V9.11.2	V9.13.1	9002#	CAP25

Part No.	Ref. Length(mm)				Rim Hole Dia. (mm/in.)	Parts			
	B	D	E	W		Rubber Grommet	Nut	Core	Cap
V3.18.1	64	24.5	14.5	146°	20.5/.812"	V9.11.2	V9.13.1	9002#	CAP25
V3.18.2	81	24.5	14.5	146°	20.5/.812"	V9.11.2	V9.13.1	9002#	CAP25
V3.18.4	51	37.5	19.5	138°	20.5/.812"	V9.11.2	V9.13.1	9002#	CAP25
V3.18.5	68	37.5	19.5	138°	20.5/.812"	V9.11.2	V9.13.1	9002#	CAP25

Part No.	Ref. Length(mm)				Rim Hole Dia. (mm/in.)	Parts			
	B	D	E	W		Rubber Grommet	Nut	Core	Cap
V3.19.1	92	24.5	14.5	147°	20.5/.812"	V9.11.2	V9.13.1	9002#	CAP25
V3.19.2	76	24.5	15	145°	20.5/.812"	V9.11.2	V9.13.1	9002#	CAP25
V3.19.3	91	24.5	10	145°	20.5/.812"	V9.11.2	V9.13.1	9002#	CAP25



Industrial and Agricultural Valves

Valve Core, Cap and Replacement





Valve Extensions

Chuck and Gauge



Part No.	Description	Length(mm)	Diameter(mm)
EX75R	Flexible rubber valve extension	75	12/10
EX100R		100	12/10
EX125R		125	12/10
EX150R		150	12/10
EX180R		180	12/10
EX210R		210	12/10
EX210R-FVE1		210	12/10
EX250R		250	12/10
EX270R		270	12/10
EX300R		300	12/10




Part No.	Description	Length(mm)	Diameter(mm)
EX64RM	Stainless steel braided rubber valve extension	65	12/10
EX125RM		125	12/10
EX150RM		150	12/10
EX180RM		180	12/10
EX210RM		210	12/10
EX250RM		250	12/10
EX300RM		300	12/10



Part No.	Description	EFF. Length(mm)	Total length(mm)
EX51P	Plastic valve extension	33.5	51
EX71P		53.5	71
EX95P		77.5	95
EX115P		97.5	115
EX125P		107.5	125
EX150P		132.5	150
EX170P		152.5	170
EX180P		162.5	180
EX200P	182.5	200	



Part No.	Description	EFF. Length(mm)	Total length(mm)	
EX13M	Brass valve extension	13	21	
EX19M		19	28	
EX32M		32	41	
EX40M		34	40	
EX60M		54	60	
EX84M		78	84	
EX115M		100	115	
EX125M		110	125	
EX142M		127	142	
EXMB-90				
EXMB-45				

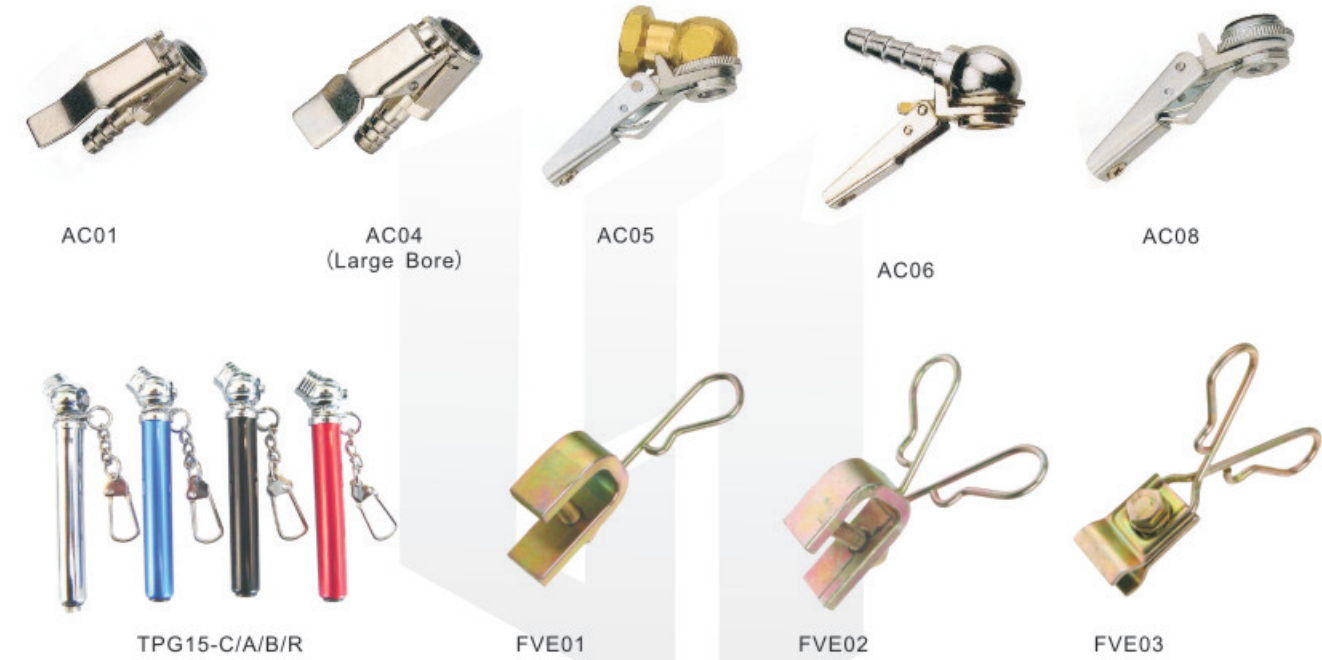

AC01 AC04 (Large Bore) AC05 AC06 AC08
TPG15-C/A/B/R FVE01 FVE02 FVE03



TPG03 TAC01 TAC02 TPG-09 TPG-06



Lux Inflator Dial Lux Inflator Digital TPGD12 TPGD13



Valve Tools

Tire Shop Tools





Euro-Style Repair Units

American Style Repair Units



ALL PURPOSE REPAIR PATCH FOR PASSENGER CAR TIRE AND TUBE		Specification (mm)	Pcs/Box
Part Nr.	Description		
RR 1025	ROUND	25	64
RR 1030	ROUND	30	36
RR 1040	ROUND	40	25
RR 1052	ROUND	52	16
RR 103424	OVAL	34X24	48
RR105032	OVAL	50X32	24
RR107240	OVAL	72X40	15



RADIAL TIRE REPAIR PATCH FOR ON AND OFF ROAD		Specification (mm)	Pcs/Box
Part Nr.	Description		
RR404576	RECTANGULAR, 1 PLY	45X76	20
RR405075	RECTANGULAR, 1 PLY	50X75	20
RR405575	RECTANGULAR, 1 PLY	55X75	20
RR405585	RECTANGULAR, 1 PLY	55X85	20
RR4065105	RECTANGULAR, 1 PLY	65X105	20
RR407590	RECTANGULAR, 1 PLY	75X90	20
RR4095100	RECTANGULAR, 1 PLY	95X100	10
RR4075125	RECTANGULAR, 2 PLY	75X125	10
RR4075150	RECTANGULAR, 2 PLY	75X150	10
RR4080125	RECTANGULAR, 2 PLY	80X125	10
RR4090135	RECTANGULAR, 3 PLY	90X135	10
RR4090155	RECTANGULAR, 3 PLY	90X155	10
RR40100190	RECTANGULAR, 4PLY	100X190	10
RR40100200	RECTANGULAR, 4 PLY	100X200	10
RR40115125	RECTANGULAR, 3 PLY	115X125	10
RR40115200	RECTANGULAR, 4 PLY	115X200	10
RR40125215	RECTANGULAR, 4 PLY	125X215	10
RR40130190	RECTANGULAR, 4 PLY	130X190	10
RR40150150	SQUARE, 4 PLY	150X150	10



BIAS TIRE REPAIR PATCH FOR ON AND OFF ROAD		Specification (mm)	Pcs/Box
Part Nr.	Description		
RR3075	CROSS, 1 PLY	75X75	20
RR3090	CROSS, 2 PLY	90X90	10
RR30102	CROSS, 2 PLY	102X102	10
RR30105	CROSS, 2 PLY	105X105	10
RR30115	CROSS, 2 PLY	115X115	10
RR30135	CROSS, 4 PLY	135X135	10
RR30140	CROSS, 4 PLY	140X140	10
RR30165	CROSS, 4 PLY	165X165	10
RR30175	CROSS, 4 PLY	175X175	10
RR30190	CROSS, 4 PLY	190X190	10
RR30215	CROSS, 4 PLY	215X215	10
RR30250	CROSS, 6 PLY	250X250	5
RR30260	CROSS, 6 PLY	260X260	5
RR30265	CROSS, 6 PLY	265X265	5
RR30300	CROSS, 6 PLY	300X300	5
RR30320	CROSS, 6 PLY	320X320	5
RR30350	CROSS, 8 PLY	350X350	5



ALL PURPOSE REPAIR PATCH FOR PASSENGER CAR TIRE AND TUBE		Specification (mm)	Pcs/Box
Part Nr.	Description		
RA2035	ROUND	35	50
RA2045	ROUND	45	50
RA2060	ROUND	60	30
RA2065	ROUND	65	30
RA2075	ROUND	75	30
RA2080	ROUND	80	30
RA204545	SQUARE	45X45	60
RA205555	SQUARE	55X55	40
RAU032	ROUND, ALU FILM	32	80
RAU038	ROUND, ALU FILM	38	70
RAU045	ROUND, ALU FILM	45	55
RAU055	ROUND, ALU FILM	55	45
RAU080	ROUND, ALU FILM	80	30
RA-EZ240	EASY-SHEET	240X480	1



BIAS TIRE REPAIR PATCH FOR ON AND OFF ROAD		Specification (mm)	Pcs/Box
Part Nr.	Description		
RA3060	ROUND, 1 PLY	60	25
RA3075	ROUND, 1 PLY	75	20
RA3090	CROSS, 2 PLY	90X90	10
RA30100	CROSS, 2 PLY	100X100	10
RA30130	CROSS, 4 PLY	130X130	10
RA30165	CROSS, 4 PLY	165X165	10
RA30240	CROSS, 6 PLY	240X240	5
RA30290	CROSS, 6 PLY	290X290	5




RADIAL TIRE REPAIR PATCH FOR ON AND OFF ROAD		Specification (mm)	Pcs/Box
Part Nr.	Description		
RA404575	RECTANGULAR, 1 PLY	45X75	20
RA4060100	RECTANGULAR, 1 PLY	60X110	10
RA4075125	RECTANGULAR, 2 PLY	75X125	10
RA4075145	RECTANGULAR, 2 PLY	75X145	10
RA4075165	RECTANGULAR, 2 PLY	75X165	10
RA4075215	RECTANGULAR, 3 PLY	75X215	10
RA4075250	RECTANGULAR, 3 PLY	75X250	10
RA40100125	RECTANGULAR, 3 PLY	100X125	10
RA40100200	RECTANGULAR, 3 PLY	100X200	10
RA40125170	RECTANGULAR, 3 PLY	125X170	10
RA40125250	RECTANGULAR, 4 PLY	125X250	10
RA40125325	RECTANGULAR, 4 PLY	125X325	10



CHEMICALS		Pcs/Box
Part Nr.	Description	
CE-250	VULCANIZING CEMENT, 250ML	40
CE-500	VULCANIZING CEMENT, 500ML	20
BS-1000	BEAD SEALER, 1000ML	10
BS-250	BEAD SEALER, 250ML	40
LUB-1	TIRE MOUNTING PASTA, 1KG	8
LUB-3	TIRE MOUNTING PASTA, 3KG	4
LUB-5	TIRE MOUNTING PASTA, 5KG	2
MP-3	TIRE MARK CRAYON, HEX 8MM	12



Tire Puncture Seal Insert String & Combi

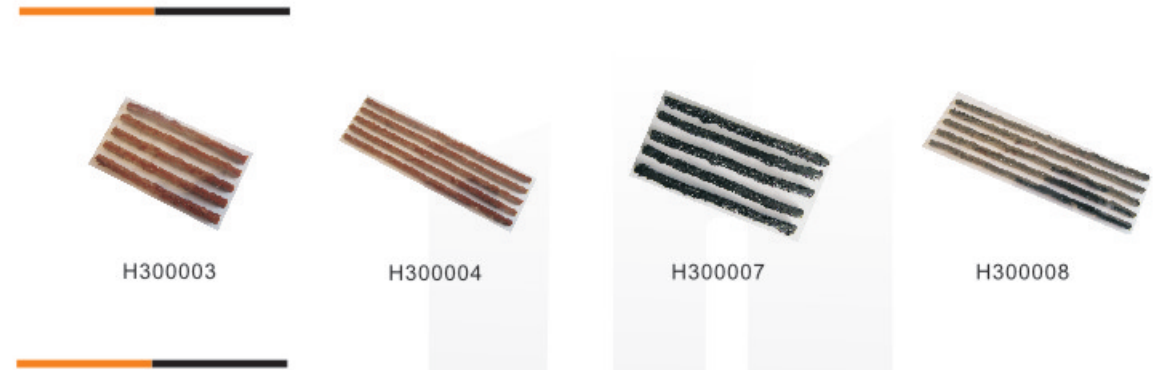

Part No.	Description	Diameter/Length	Package/box
H300001	Motorcycle and Passenger Car Tire Seal String in Color Brown	3.5mm / 100mm(4")	10strings/card, 12cards/box
H300002	Motorcycle and Passenger Car Tire Seal String in Color Brown	3.5mm / 200mm(8")	10strings/card, 6cards/box
H300003	Truck and Bus Tire Seal String in Color Brown	6.0mm / 100mm(4")	5strings/card, 12cards/box
H300004	Truck and Bus Tire Seal String in Color Brown	6.0mm / 200mm(8")	5strings/card, 6cards/box
H300005	Motorcycle and Passenger Car Tire Seal String in Color Black	3.5mm / 100mm(4")	10strings/card, 12cards/box
H300006	Motorcycle and Passenger Car Tire Seal String in Color Black	3.5mm / 200mm(8")	10strings/card, 6cards/box
H300007	Truck and Bus Tire Seal String in Color Black	6.0mm / 100mm(4")	5strings/card, 12cards/box
H300008	Truck and Bus Tire Seal String in Color Black	6.0mm / 200mm(8")	5strings/card, 6cards/box

Combi Patch			Pcs/Box
Part Nr.	Stem Diameter / mm	Patch diameter mm	
COMBI4	4	26	24
COMBI4L	4	36	24
COMBI6	6	36	24
COMBI6L	6	46	24
COMBI9	9	50	24
COMBI9L	9	60	24



Self-Service Tire Repair Kits



TRK100-7PCS



TRK200-15PCS



TRK300-27PCS

VARIOUS CUSTOM KITS AVAILABLE



TRK500-26PCS



TRK600-48PCS



Wheel Lug Nuts

Lug Bolts

HEX	THREAD	DESIGN
13/16"	3/8"	   
	7/16"	<p>ACORN-01 ACORN-02 ACORN-03 ACORN-04</p>
	3/4"	   
	1/2"	<p>ACORN-03B ACORN-03R BULGE-01 BULGE-02</p>
7/8"	9/16"	   
	1.25	<p>BULGE-03 BULGE-FORD BULGE-04 DUPLEX-01</p>
	5/8"	   
	10MM	<p>DUPLEX-02 DUPLEX-03 MAG-01 MAG-02</p>
17MM	12MM	   
	14MM	<p>MAG470 SPLINE-01 SPLINE-02 TUNER-01</p>
	1.75	   
	16MM	<p>MAG470 SPLINE-01 SPLINE-02 TUNER-01</p>
21MM	18MM	   
	2	<p>MAG470 SPLINE-01 SPLINE-02 TUNER-01</p>

CUSTOM-TAILORING IS ACCEPTED ON HEIGHT AND COLOR FINISH


HEX	THREAD	SEAT	DESIGN	
17MM	12MM	1.25		
			24MM	<p>HEX</p>
			25MM	
			26MM	<p>SPLINE</p>
19MM	14MM	1.5		
			28MM	<p>SOCKET</p>
			30MM	
			35MM	<p>SOCKET</p>
19MM	14MM	1.5		
			40MM	<p>SOCKET</p>
			45MM	
			50MM	<p>SOCKET</p>
19MM	14MM	1.5		
			60MM	<p>SOCKET</p>

CUSTOM-TAILORING IS ACCEPTED ON HEIGHT AND COLOR FINISH




Wheel Spacer & Adaptor

PART NR.	THICKNESS	BOLT	PCD	CB
HWS10-4	10mm	4	108	65.1
HWS15-1	15mm	4	100	57.1
HWS15-2	15mm	4	100	60.1
HWS15-3	15mm	4	108	65.1
HWS15-4	15mm	5	112	66.6
HWS15-5	15mm	5	120	72.5
HWS15-6	15mm	5	120	72.5
HWS20-1	20mm	4	100	57.1
HWS20-2	20mm	4	108	65.1
HWS20-3	20mm	5	112	66.6
HWS20-4	20mm	5	120	72.5
HWS25-1	25mm	4	108	65.1
HWS35-1	35mm	4	108	65.1

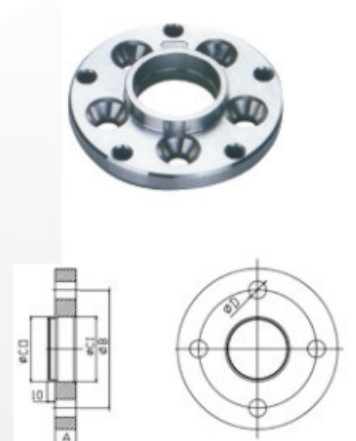

PART NR.	FROM	TO	CB	OD	THICKNESS		
HWA4-1	4	98	4	100	71	150	15/20/25/30
HWA4-2	4	100	4	114.3	71	150	15/20/25/30
HWA4-3	4	108	4	100	71	150	15/20/25/30
HWA4-4	4	110	4	114.3	74	164	15/20/25/30
HWA5-1	5	98	5	100	74	164	15/20/25/30
HWA5-2	5	100	5	114.3	71	150	15/20/25/30
HWA5-3	5	102	5	114.3	74	164	15/20/25/30
HWA5-4	5	108	5	120	74	164	15/20/25/30
HWA5-5	5	110	5	114.3	74	164	15/20/25/30
HWA5-6	5	114.3	5	127	78	164	15/20/25/30
HWA5-7	5	114.3	5	135	87.18	176	15/20/25/30
HWA5-8	5	118	5	120	74	164	15/20/25/30
HWA5-9	5	130	5	139.7	87.1	176	15/20/25/30
HWA5-10	5	135	5	139.7	87.1	176	15/20/25/30



Hub Center Ring



PART NR.	O.D.-I.D.	PART NR.	O.D.-I.D.	PART NR.	O.D.-I.D.	PART NR.	O.D.-I.D.
H60-5410	60.1-54.1	H70-5410	70.1-54.1	H73-5410	73.1-54.1	H73-5410	74-54.1
H60-5610	60.1-56.1	H70-5610	70.1-56.1	H73-5610	73.1-56.1	H73-5610	74-56.1
H60-5660	60.1-56.6	H70-5660	70.1-56.6	H73-5660	73.1-56.6	H74-5660	74-56.6
H60-5710	60.1-57.1	H70-5710	70.1-57.1	H73-5710	73.1-57.1	H74-5710	74-57.1
H60-5810	60.1-58.1	H70-5810	70.1-58.1	H73-5810	73.1-58.1	H74-5810	74-58.1
H63-5410	63.4-54.1	H70-5910	70.1-59.1	H73-5860	73.1-58.6	H74-5910	74-59.1
H63-5610	63.4-56.1	H70-6010	70.1-60.1	H73-5910	73.1-59.1	H74-6010	74-60.1
H63-5660	63.4-56.6	H70-6340	70.1-63.4	H73-5960	73.1-59.6	H74-6340	74-63.4
H63-5710	63.4-57.1	H70-6510	70.1-65.1	H73-6010	73.1-60.1	H74-6390	74-63.9
H63-5810	63.4-58.1	H70-6660	70.1-66.6	H73-6340	73.1-63.4	H74-6410	74-64.1
H63-5910	63.4-59.1	H72-5410	72.6-54.1	H73-6350	73.1-63.5	H74-6510	74-65.1
H64-5410	64-54.1	H72-5610	72.6-56.1	H73-6390	73.1-63.9	H74-6610	74-66.1
H64-5610	64-56.1	H72-5660	72.6-56.6	H73-6410	73.1-64.1	H74-6660	74-66.6
H64-5660	64-56.6	H72-5710	72.6-57.1	H73-6510	73.1-65.1	H74-6710	74-67.1
H64-5710	64-57.1	H72-5920	72.6-59.2	H73-6610	73.1-66.1	H74-7010	74-70.1
H64-5810	64-58.1	H72-5960	72.6-59.6	H73-6660	73.1-66.6	H74-7030	74-70.3
H64-5910	64-59.1	H72-6010	72.6-60.1	H73-6710	73.1-67.1	H74-7150	74-71.5
H64-6010	64-60.1	H72-6340	72.6-63.4	H73-7010	73.1-70.1	H74-7260	74-72.6
H67-5410	67.1-54.1	H72-6390	72.6-63.9	H73-7030	73.1-70.3	H78-6610	78.1-66.1
H67-5610	67.1-56.1	H72-6410	72.6-64.1	H73-7050	73.1-70.5	H78-6656	78.1-66.56
H67-5660	67.1-56.6	H72-6510	72.6-65.1	H73-7150	73.1-71.5	H78-7030	78.1-70.3
H67-5710	67.1-57.1	H72-6610	72.6-66.1			H78-7150	78.1-71.5
H67-5810	67.1-58.1	H72-6660	72.6-66.6			H78-7256	78.1-72.56
H67-5860	67.1-58.6	H72-6710	72.6-67.1			H78-7410	78.1-74.1
H67-5910	67.1-59.1	H72-7010	72.6-70.1				
H67-6010	67.1-60.1	H72-7030	72.6-70.3				
H67-6340	67.1-63.4	H72-7050	72.6-70.5				
H67-6410	67.1-64.1						




Garage Equipment

Labor Saving Wrench / Torque Multiplier



Impact Wrench & Kit



Paint Eraser & Pad



Bead Seating Inflator 5, 10 Galon



ZOOTAH 6L, 9L, 12L



Truck Tire Changer THC700



Truck Tire Changer THC300



Hydraulic Jack



Tire Spreader



Camber Bolt



WB1-1 Quick Nut



Tire Bead Holder YT-I



Tire Bead Holder YT-A



Tire Mounting Head TCB-1



Tire Mounting Head TCB-SS



WB2-1



Model:HLH-58-1
Material: 40Cr
Length: 270mm
Gear ratio: 1:58
Max safe output torque: 3800N.M
Weight: 7.5kg/set
Carton size: 38*38*21cm
Sockets: 2pcs



Model:HLH-58-2
Material: 40Cr
Length: 270mm
Gear ratio: 1:58
Max safe output torque: 3800N.M
Weight: 13kg/set
Carton size: 40*27.5*31.5cm
Sockets: 8pcs



Model:HLH-58L
Material: 40Cr
Length: 310mm
Gear ratio: 1:58
Max safe output torque: 3800N.M
Weight: 8kg/set
Carton size: 41*37.5*21cm
Sockets: 2pcs



Model:HLH-68
Material: 40Cr
Length: 270mm
Gear ratio: 1:68
Max safe output torque: 4800N.M
Weight: 8kg/set
Carton size: 38*31*24.5cm
Sockets: 2pcs



Model:HLH-68L
Material: 40Cr
Length: 310mm
Gear ratio: 1:68
Max safe output torque: 4800N.M
Weight: 8.5kg/set
Carton size: 40*30*23.5cm
Sockets: 2pcs



Model:HLH-78
Material: 40Cr
Length: 330mm
Gear ratio: 1:78
Max safe output torque: 5800N.M
Weight: 9.5kg/set
Carton size: 42*34*22cm
Sockets: 2pcs



Labor Saving Wrench / Torque Multiplier



Model:HLH-88-1
Material: 40Cr
Length: 350mm
Gear ratio: 1:64/1:3/1:1
Max safe output torque: 4800N.M
Weight: 12kg/set
Carton size:35*32.5*23.5 cm
Sockets: 5pcs



Model:HLH-88-2
Material: 40Cr
Length: 320mm
Gear ratio: 1:64/1:4.2/1:1
Max safe output torque: 4800N.M
Weight: 9.5kg/set
Carton size: 35*32.5*23.5cm
Sockets: 2pcs



Model:HLH-64
Material: 40Cr
Length: 245mm
Gear ratio: 1:64/1:3/1:1
Max safe output torque: 3800N.M
Weight: 8kg/set
Carton size: 39*28.5*22.5cm
Sockets: 3pcs



Model:HLH-64L
Material: 40Cr
Length: 245mm
Gear ratio: 1:64/1:3/1:1
Max safe output torque: 3800N.M
Weight: 9kg/set
Carton size: 40.5*28.*20.5cm
Sockets: 2pcs



Model:HLH-16
Material: 40Cr
Gear ratio: 1:16
Max safe output torque: 360N.M
Weight: 2kg/set
Carton size: 43*29*22.5cm
Sockets: 3pcs




Socket size available:
17mm 19mm 21mm 22mm
24mm 27mm 30mm 32mm
33mm 34mm 36mm 38mm 41mm

IQUA™



DUAL TIRE PRESSURE EQUALIZING AND ALERTING SYSTEM - TPEA

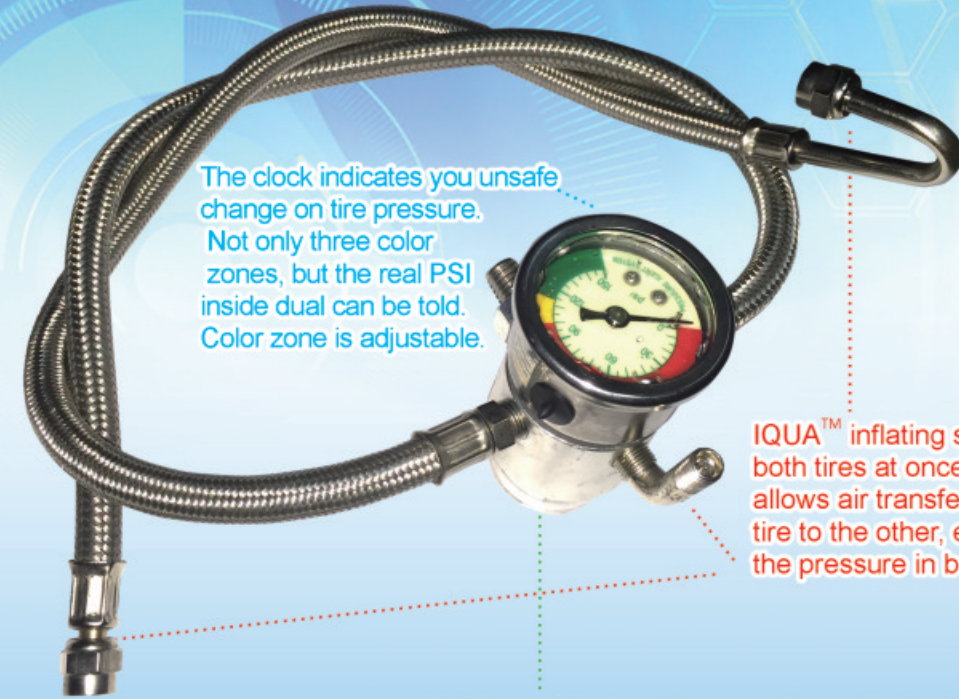

The clock indicates you unsafe change on tire pressure. Not only three color zones, but the real PSI inside dual can be told. Color zone is adjustable.

IQUA™ inflating stem fills both tires at once and allows air transfer from one tire to the other, equalizing the pressure in both tires.

An internal check valve provides added safety by preventing both tires from going flat in the event of a leak, a blow out or when one of the pressure hoses is cut or broken.

DRIVE SAFE AND ECONOMY

According to Goodyear, under inflation is the number one cause of tire failure. If the pressure in your duals is not the same, the diameter of the tires will differ. Since duals are bolted together, the smaller tire will be dragged. With just a 5% difference in PSI, the smaller tire will be dragged 13 feet every mile. That reduces MPG and increases the risk of a blow out.

For order form and question,
Write to info@hwilihwa.com
Dial cell phone or whatsapp +8613864873995
Skype online rockie737

